



Tray Packer Condi Film - FC2000 Family FC 2010 - 2 litres Capacity



Technical data

Installation drawing : N° 4 02 188 A
 Maximum cycles per minute :60
 Maximum packages per hour :18 000
 Change over times : ± 5 min
 (for a well trained technician)

Selection operator side

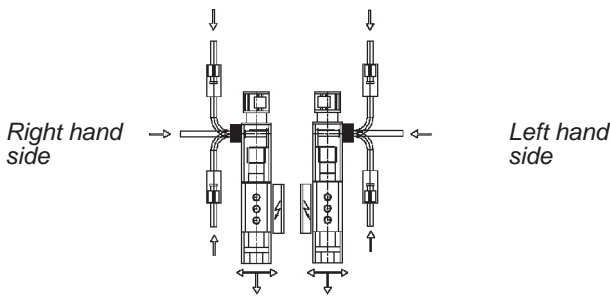

Arrangements

2x1, 2x2, 2x3,
 3x1, 3x2, 3x3, 3x4
 4x1, 4x2, 4x3, 4x4
 5x1, 5x2, 5x3, 5x4
 ...




*Note :
 «Belly to belly» arrangements need 90°
 device option. ...x3, ...x4 need a 3 tracks in line divider.

Range of product able to run in this machine

Range of product able to run in this machine
 Any bircks or packages includes in the following dimensions

Range of collation

	P	L	H
Min.	70	100	120
Max.	150	500	240

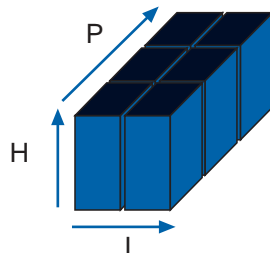

Compressed air

Dry compressed air : 6 bars
 Consumption :5 Nm3/h
 Connection Thread :G1/2" internal

Electricity

Supply voltag3N - 50Hz 400/230V
 Capacity to be installed35 kW
 ProtectionMain Interrupter
 Cable area (min) :25mm²
 ICCcustomer supply

Tray Packer Condi Film - FC2000 Family

FC 2010 - 2 litres Capacity

