



Tray Packer Condi Film Famille BB BB 12 - Cardboard

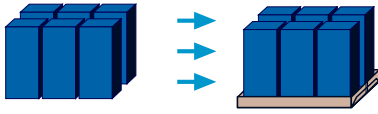


Technical data

Installation drawing : N° 4 01 560
 Maximum cycles per minute : 40
 Maximum packages per hour : 18 000
 Change over times : ± 5 min
 (for a well trained technician)

Selection operator side

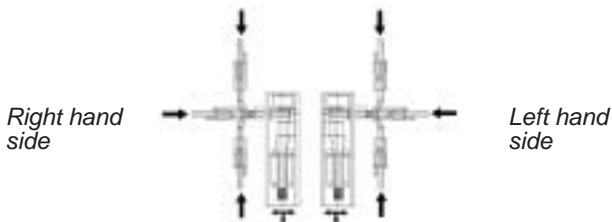


Cardboard and Folding

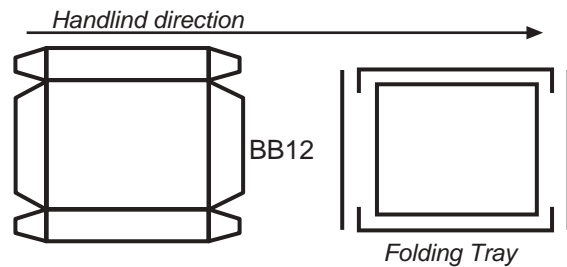

Range of product able to run in this machine
 Any bircks or packages includes in the following dimensions

Range of collation

	P	L
Min.	100	150
Max.	400	420

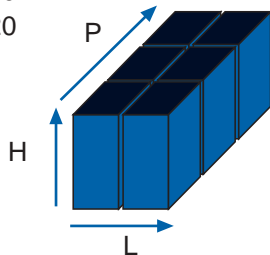

Cardbord - Dimensions mini / maxi

	P	L
	Non adjustable	
Mini.	300	250
Max.	540	830

Arrangementss

2x2,
 3x2, 3x3,... 3x9, 3x10
 4x2, 4x3,...4x6, 4x10
 5x1, 5x2,... 5x6
 following dimensions



Tray Packer Condi Film Family BB

BB 12 - Cardboard

Compressed air

Dry compressed air : 6 bars
 Consumption : 5 Nm³/h
 Connection Thread : G1/2" internal
 Connexion Machine : voir plan d'implantation

Electricity

Supply voltage : 3N – 50Hz 400/230V
 Capacity to be installed : 10 kW
 Protection : Main Interrupter
 Cable aera (min) : 25mm²
 ICC : Customer supply

