



Tray Packer - Condi Film BB Family BQ 5 - Cardboard

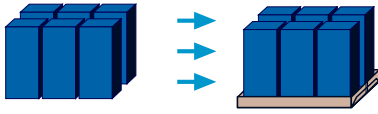

Technical data

Installation drawing : N° 4 02 341
 Maximum cycles per minute : 40
 Maximum packages per hour : 18 000
 Change over times : ± 5 min
 (for a well trained technician)


Selection operator side

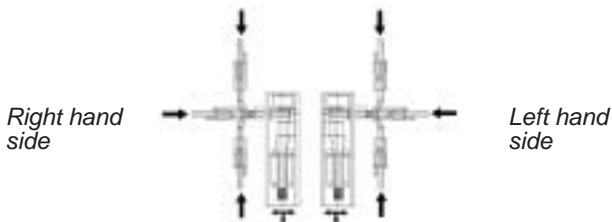


Range of product able to run in this machine
 Any bircks or packages includes in the following dimensions

Range of collation

	P	L
Min.	250	125
Max.	400	280



Cardboard and Folding

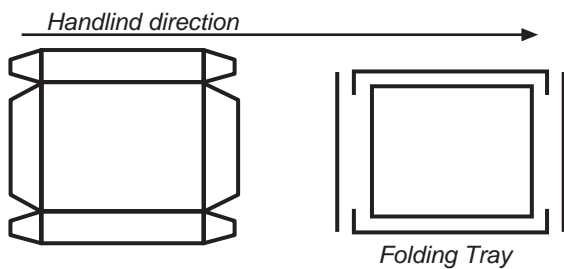

Cardbord - Dimensions mini / maxi

	P		L
	Non adjustable		
Mini.	300		250
Max.	520		520

Arrangementss

2x2,
 3x2, 3x3,... 3x9, 3x10
 4x2, 4x3,...4x6, 4x10
 5x1, 5x2,... 5x6
 following dimensions



Tray Packer - Condi Film BB Family

BQ 5 - Cardboard

Compressed air

Dry compressed air : 6 bars
Consumption : 5 Nm³/h
Connection Thread : G1/2" internal

Electricity

Supply voltage : 3N – 50Hz 400/230V
Capacity to be installed : 10 kW
Protection : Main Interrupter
Cable area (min) : 25mm²
ICC : Customer supply

